


EcoPAK® AL

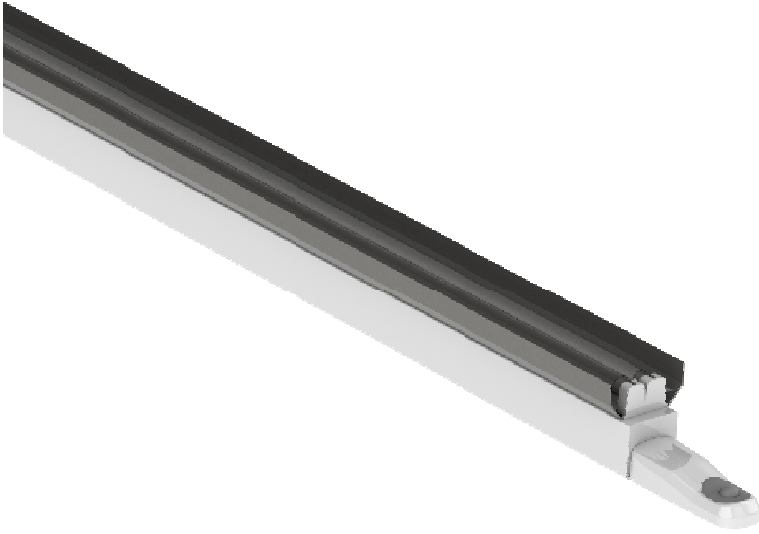

EcoPAK® AL offers robust construction and innovative design, and is suitable for a wide variety of commercial and industrial applications

- Impressive ROI achieved with efficient operation and low initial outlay
- Unique & innovative reflector design in high purity MIRO4
- Manufactured from high quality powder coated zintec steel
- High power factor & low total harmonic distortion
- High quality UK lamp and gear package - up to 5 year guarantee
- Emergency conversion, daylight dimming & occupancy detection available
- Exceeds criteria for Enhanced Capital Allowance

Order Guide

| Product Code | Lamp | Optic | Length (mm) | Width (mm) | Height (mm) |
|--------------|----------|----------|-------------|------------|-------------|
| EP135AL | 1x35w T5 | Standard | 1495 | 85 | 85 |
| EP235AL | 2x35w T5 | Standard | 1495 | 85 | 85 |
| EP149AL | 1x49w T5 | Standard | 1495 | 85 | 85 |
| EP249AL | 2x49w T5 | Standard | 1495 | 85 | 85 |
| EP180AL | 1x80w T5 | Standard | 1495 | 85 | 85 |
| EP280AL | 2x80w T5 | Standard | 1495 | 85 | 85 |

Accessories

| Code | Description |
|---------|---|
| .../M3 | 3 hour maintained emergency |
| .../DS | DSI dimming |
| .../SS | iSMART Integral sensor for presence detection and daylight switching |
| .../DD | DALI dimming |
| .../SDD | iSMART Integral sensor for presence detection and daylight dimming - DALI |
| EBFK | "EasiFIX" adjustable wire suspension kit |

Fixing Options

| Nominal Size (mm) | Fixing Centres (mm) | Recessed | Surface Fix | Suspension Fix | Conduit Entry |
|-------------------|---------------------|----------|-------------|----------------|---------------|
| 1500x80 | 600 | n/a | yes | yes | yes |

Lamp Performance

| Lamp Type | Nominal Length (mm) | Power (w) | Nominal Lumens | CRI | CCT (K) | Rated Life |
|----------------|---------------------|-----------|----------------|-----|---------|------------------|
| T5 Eco | 1500 | 32 | 3300 | >80 | 4000 | Up to 24,000 hrs |
| T5 Long Life | 1500 | 35 | 3300 | >80 | 4000 | Up to 45,000 hrs |
| T5 Eco | 1500 | 45 | 4300 | >80 | 4000 | Up to 24,000 hrs |
| T5 High Output | 1500 | 49 | 4300 | >80 | 4000 | Up to 24,000 hrs |
| T5 Long Life | 1500 | 49 | 4300 | >80 | 4000 | Up to 45,000 hrs |
| T5 Eco | 1500 | 73 | 6150 | >80 | 4000 | Up to 24,000 hrs |
| T5 High Output | 1500 | 80 | 6150 | >80 | 4000 | Up to 24,000 hrs |
| T5 Long Life | 1500 | 80 | 6150 | >80 | 4000 | Up to 45,000 hrs |

Photometric Data

