


EcoSTAR® Linear Plus

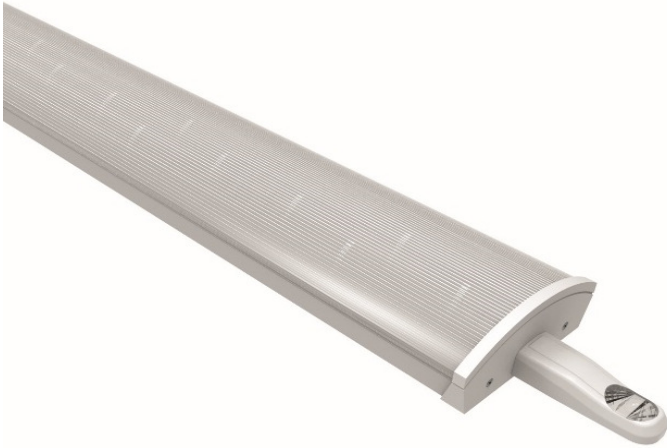

Developed for industrial use at lower mounting heights, EcoSTAR® Linear Plus offers efficient performance in a durable low profile housing.

- Aluminium body construction for optimum LED performance
- Satine anti-glare polycarbonate diffuser ideal for low level applications
- Longest system life >100K hours
- Lowest maintenance industrial solution
- Philips 5 year system warranty
- IP40 construction with fully retained cover, offering dust ingress protection and tamper proof fixings

Order Guide

Product Code	Optic	Lumens	Length (mm)	Width (mm)	Height (mm)
ES4401LINP	Satine diffuser	3650	1195	170	75
ES5501LINP	Satine diffuser	4550	1495	170	75
ES8001LINP	Satine diffuser	6600	1195	170	75
ES10001LINP	Satine diffuser	8250	1495	170	75
ES16001LINP	Satine diffuser	13250	1795	170	75
ES20001LINP	Satine diffuser	16500	1795	170	75

Accessories

Code	Description
.../M3	3 hour maintained emergency
.../PM3	3 hour maintained emergency LED pod
.../M3ST	3 hour emergency - self test
.../M3AT	3 hour emergency - auto test
.../DS	DSI dimming
.../SE	iSMART Integral "end-fix" sensor for presence detection and daylight switching
.../DD	DALI dimming
.../SED	iSMART Integral "end-fix" sensor for presence detection and daylight dimming - DALI

Fixing Options

Nominal Size (mm)	Fixing Centres (mm)	Recessed	Surface Fix	Suspension Fix	Conduit Entry
1195	600	n/a	yes	yes	yes
1495	1200	n/a	yes	yes	yes

LED Performance

Product Code	Projected Life To L70/B50	CCT (K)	Power (w)	Luminaire Lumens	l/cw	CRI
ES5501LNP	100,000 hours	4000	38.5	4550	118.2	>80
ES10001LNP	100,000 hours	4000	71.5	8250	115.4	>80
ES16001LNP	100,000 hours	4000	114.4	13250	115.8	>80

Photometric Data

